(43) International Publication Date 28 July 2005 (28.07.2005)

**PCT** 

## (10) International Publication Number WO 2005/068902 A1

(51) International Patent Classification<sup>7</sup>: 21/28

F21V 21/32,

(21) International Application Number:

PCT/IT2005/000023

(22) International Filing Date: 18 January 2005 (18.01.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: RM 2004 U 000006 19 January 2004 (19.01.2004) IT

(71) Applicants and

(72) Inventors: MARRA, Claudio [IT/IT]; Via Francesco de Vico, 16B, I-00142-Roma (IT). MARRA, Andrea [IT/IT]; Via Francesco de Vico, 16B, I-00142-Roma (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SPIRAL SHAPED, WITH JOINTED RIGID ARMS, FOLDABLE LAMP

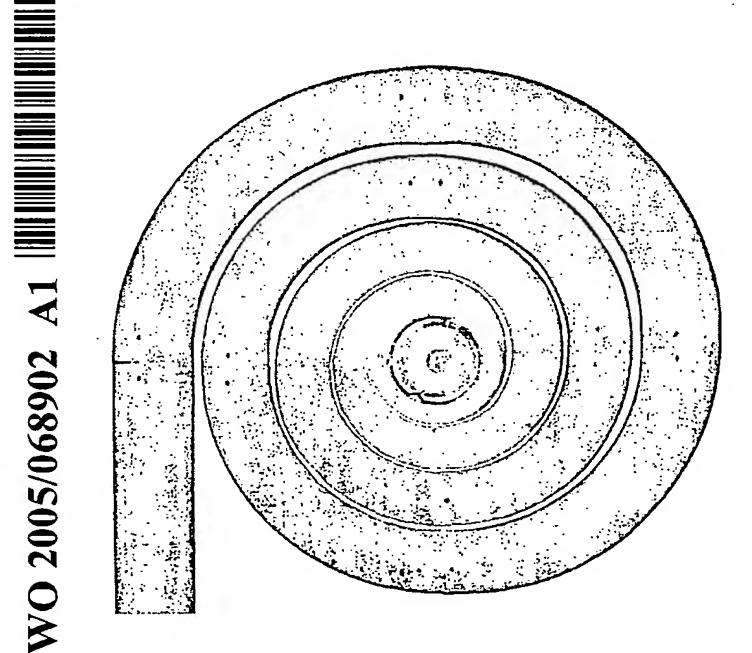

(57) Abstract: The present invention concerns a lamp with jointed rigid arms forming, in the folded position, a spiral shape, that can be a circular spiral or a polygonal spiral: see Fig. 1A, 2, 12, 13, 14, 15, 16. The arms are joined one another by means of joints, see Fig. 3, housed and locked inside the arms, and that consist of cylindrical hinges provided with brakes having an adjustable braking moment, see Fig. 3, 4 and 5. This allows to turn at will the arms one another and to keep them still in the wanted position. The joints have a pass through hole inside, see Fig. 3, 7 and 8, to permit the passing of the electric wires or of the optical fibres.

BEST AVAILABLE COPY